


Laboratory shakers

Advantages

- orbital movement
- microprocessor control of rotation and time
- orbital diameter: 10...25 mm
- max load: 10 kg
- variable speed control: 30...500 rpm
- shaking mode: from 1 min to 99 h, or continuous operation
- LCD digital display
- anti-skid mat (option)
- various shaking tables
- can be located inside cooled incubators

Accessories

- universal shaking table
- separating funnel attachment
- platform for Petri plates
- fixing clip support
- dish attachment
- test tube support
- Erlenmeyer flasks (25...2000 ml) attachment
- anti-skid mat

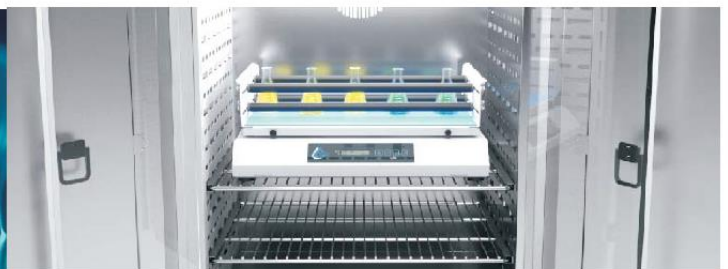

LS 280

LS 350

LS 500

LS 700



Parameter					
movement		orbital			
controller		microprocessor			
display		LCD display			
speed range [rpm]		30 ... 500		30 ... 300	
accuracy [rpm]		10			
amplitude [mm]		5	5 or 12,5 (optional when placing an order)		
max load capacity [kg]		10			
shaking mode		1min ... 99h or continuous operation			
dimensions without / with shaking table [mm]	width	320	390	550	700
	height	120 / 220	120 / 220	120 / 220	120 / 220
	depth	330	400	440	420
fits to cooled incubator		ILW 53	ILW 115	ILW 240	ILW 400
nominal power [W]		60			
weight with shaking table [kg]		10	15	22	25
ambient temperature [°C]		+10...+40			
humidity [%]		up to 70			
voltage		230 V 50-60 Hz			
warranty		24 months			



Universal platform

Universal platform for various kinds of vessels with 4 roller clamps (without anti-skid mat).



Platform for fixing flasks handles

Platform for fixing flasks handles, suitable for flasks of the following capacities: 25ml, 50ml, 100ml, 250ml, 500ml, 2000ml, the handles shall be ordered separately.




Platform for Petri plates shaking

Platform for shaking Petri plates, bacteria culture flasks and other vessels of low centre of gravity.



Platform for separatory funnels

Platform for separatory funnels with 3 roller clamps for shaking, salting, extraction and concentration.

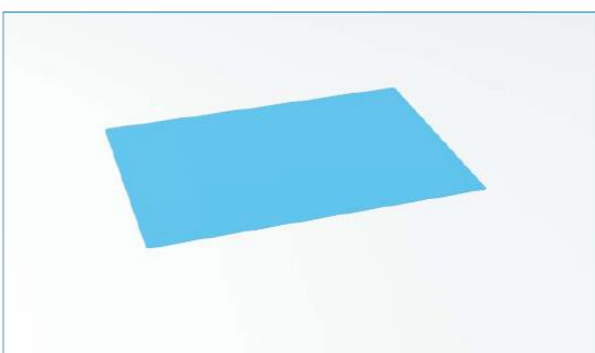

Anti-skid mat

Anti-skid mat for LS laboratory shakers.